





TRANSMISIONES INDUSTRIALES

Una Solución para cada una de las necesidades de su Empresa

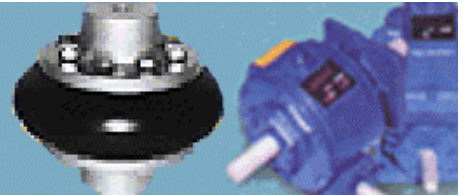

**MOTORES ELÉCTRICOS
DIMENSIONES GENERALES**

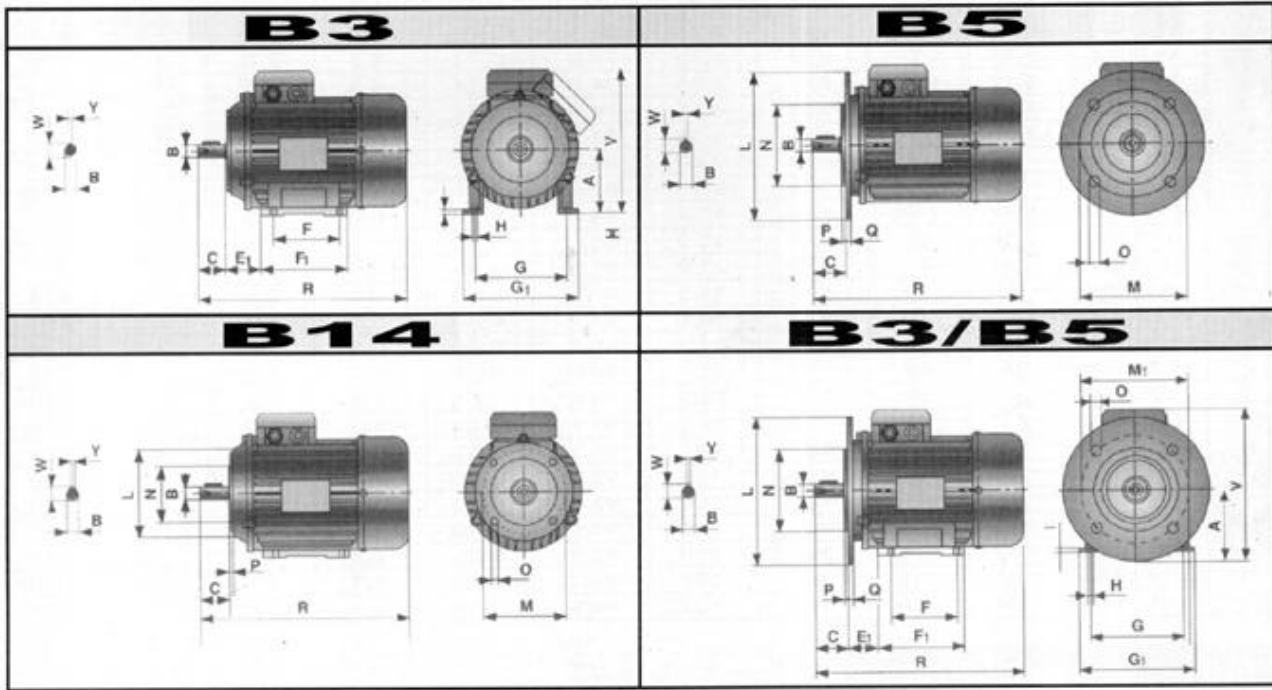

Motor	B3 - B5 - B14					B3 - B3/B5							B3 - B3/B5						B14						
	B	C	R	W	Y	A	E ₁	F	F ₁	G	G ₁	H	I	V	L	M	N	O	P	Q	L	M	N	O	P
63	11	23	210	12.5	4	63	40	80	97	100	117	7	7	148	140	115	95	10	3.0	10	90	75	60	M5	2.5
71	14	30	234	16.0	5	71	45	90	107	112	135	7	7	172	160	130	111	10	3.5	10	105	85	70	M6	2.5
80	19	40	272	21.5	6	80	50	100	125	125	150	10	9	197	200	165	130	12	3.5	10	120	100	80	M6	3.0
90S	24	50	296	27.0	8	90	56	100	125	140	165	10	10	214	200	165	130	12	3.5	10	140	115	95	M8	3.0
90L	24	50	320	27.0	8	90	56	125	150	140	165	10	10	214	200	165	130	12	3.5	10	140	115	95	M8	3.0
100	28	60	347	31.0	8	100	63	140	175	160	194	12	12	243	250	215	180	15	4.0	14	160	130	110	M8	3.5
112	28	60	391	31.0	8	112	70	140	175	190	230	12	12	260	250	215	180	15	4.0	14	160	130	110	M8	3.5
132S	38	80	440	41.0	10	132	89	140	174	216	254	12	13	305	300	265	230	15	4.0	14					
132M	38	80	485	41.0	10	132	89	178	212	216	254	12	13	305	300	265	230	15	4.0	14					
160M	42	110	630	45.0	12	160	108	210	258	245	304	15	18	385	350	300	250	19	5.0	16					
160L	42	110	630	45.0	12	160	108	254	304	254	304	15	18	385	350	300	250	19	5.0	16					
180M	48	110	660	51.5	14	180	121	241	286	279	324	15	20	440	350	300	250	19	5.0	15					
180L	48	110	660	51.5	14	180	121	279	324	279	320	15	20	440	350	300	250	19	5.0	15					
200L	55	110	670	59.0	16	200	133	305	360	318	368	19	25	460	400	350	300	19	5.0	15					
200LB	55	110	781	59.0	16	200	133	305	360	318	398	19	25	490	400	350	300	19	5.0	15					
225S	60	140	811	64.0	18	225	149	286	365	356	425	19	30	515	450	400	350	19	5.0	19					
225M2	55	110	811	59.0	16	225	149	311	380	356	425	19	30	515	450	400	350	19	5.0	19					
225M4-6	60	140	811	64.0	18	225	149	311	380	356	425	19	30	515	450	400	350	19	5.0	19					
250M2	60	140	865	64.0	18	250	168	349	325	406	458	24	35	560	550	500	450	19	5.0	19					
250M4-6	65	140	865	69.0	18	250	168	349	325	406	458	24	35	560	550	500	450	19	5.0	19					
280S2	65	140	935	69.0	18	280	190	368	460	457	560	24	35	665	550	500	450	19	5.0	18					
280S4-6	75	140	935	79.5	20	280	190	368	460	457	560	24	35	665	550	500	450	19	5.0	18					
280M2	65	140	985	69.0	18	280	190	419	510	457	560	24	35	665	550	500	450	19	5.0	18					
280M4-6	75	140	985	79.5	20	280	190	419	510	457	560	24	35	665	550	500	450	19	5.0	18					
316S2	65	140	1235	69.0	18	315	216	406	574	508	628	28	40	765	550	500	450	19	5.0	18					
316S4-6	80	170	1235	85.0	22	315	216	406	574	508	628	28	40	765	550	500	450	19	5.0	18					